

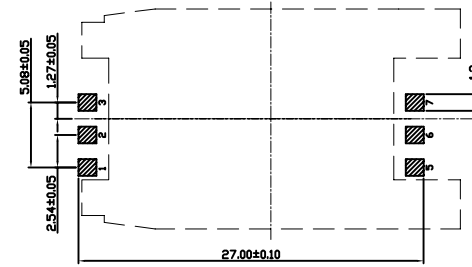
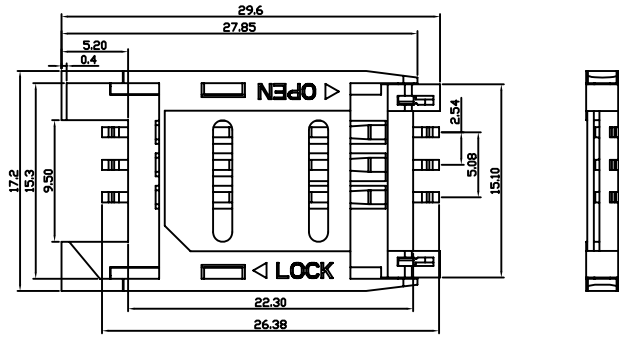


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	080505	HANG




PCB LAYOUT

PIN NO.	DESCRIPTION
P1	VCC:PWR signal and GND
P2	RST:Reset signal
P3	CLK:Clocking signal
P5	GND:PWR signal and GND
P6	VPP:Porgramming Voltage
P7	I/O:Serial date input/output
P4	Reserved
P8	Reserved
CD	Card Detect Switch



Applicable Card Size

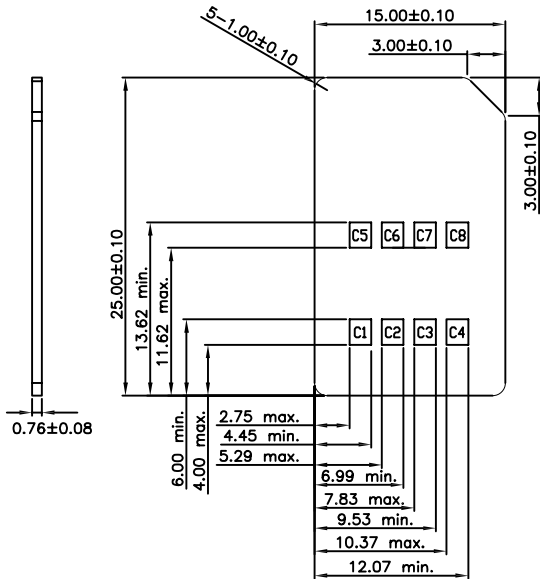


MATERIAL

- Housing: HI. -Temp. Plastic (UL 94V-0). Black
- Terminal: Copper Alloy. (T=0.15mm)
Gold Plated Over Nickel
- Fork: Copper Alloy. (T=0.20mm)
Tin Plated Over Nickel

ELETRICAL

- Current Rating: 1.0 A Max
- Dielectric Withstanding Voltage:
500V AC RMS For One Minute
- Insulation Resistance: 1000MΩ Min. AT500V. DC.
- Contact Resistance: 30MΩ Max.
- Operating Temperture: -40° C TO +85° C

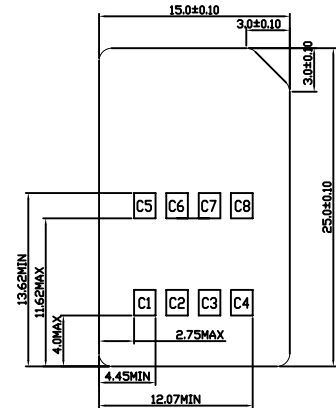

LASTAR

深圳市朗思达科技有限公司

TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com

DRAW NO.	06G-2500-0619	DATE	DRAW NAME: SIM 卡座 翻盖式 全塑6Pin H=2.5mm		
DESIGN	HANG	080505	P/N NO. SIM-06G-2500-0619 FILE:		
CHECK	WANGCM	080506	MODEL:		
APPROVED	HUYX	080506	UNIT: mm	SHEET: N/A	REV. A0 SCALE N/A

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0°
X.X	±0.25	X.X'	±3.0°
X.XX	±0.20	X.XX'	±2.0°
X.XXX	±0.10	X.XXX'	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION