所有原料材质，生产制程，电镀必须符合RoHS要求

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	150116	YINC

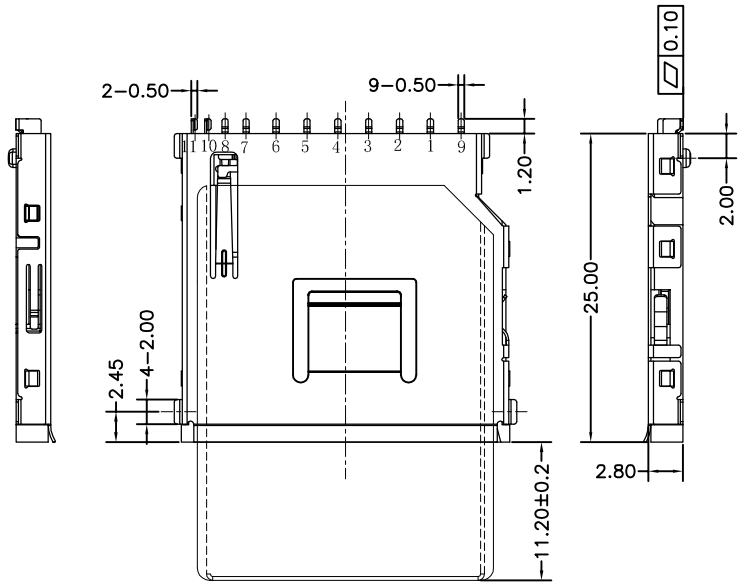



CARD DETECTION SWITCH	
WHEN CARD IS EJECTED	WHEN CARD IS INSERED
OPEN Cd G	CLOSE Cd G

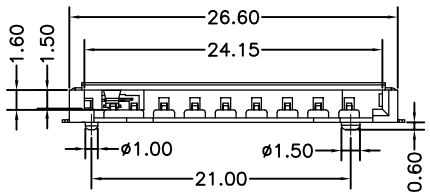

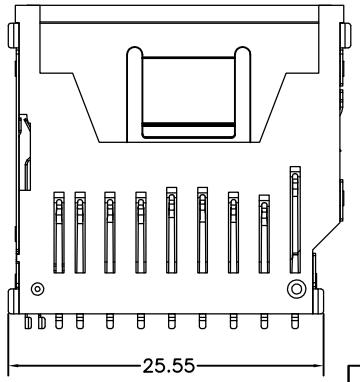

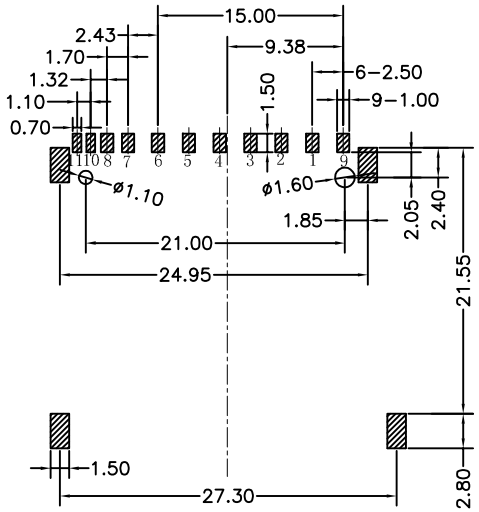

Recommened P.C.B Layout
General Tolerance±0.05

SPECIFICATION
1.ELECTRICAL CHARACTERISTIES:
CONTACT CURRENT RATING:0.5 AMPERES.
DIELECTRIC WITHSTANDING VOLTAGE:AC500VR.M.S.
LLNSULATION RESISTANTE:1000mΩ MINIMUM.
CONTACT RESISTANTE:40MΩ MAXIMUM.
2.ENVIRONMENTAL:
OPERATING TEMPERATURE:-20℃~+85℃.
3.MATERIAL:
HOUSING:H1-TEMP PLASTIC LCP UL 94V-O RATED
CANTACT:COPPER ALLOY(T=0.20MM).
SHELL:COPPER ALLOY(T=0.20MM).

Pin NO.	Pin assigenment	Pin NO.	Pin assigenment
1	DAT2	7	DAT0
2	CD/DAT3	8	DAT1
3	CMD	9	CD
4	VDD	10	WP
5	CLK	11	
6	VSS		

DIM	TOL	DIM	TOL
X.	±0.30	X°.	±4.0°
X.X	±0.25	X.X°	±3.0°
X.XX	±0.20	X.XX°	±2.0°
X.XXX	±0.10	X.XXX°	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DRAW NO.	050-11K-W0	DATE
DESIGN	YINC	150116
CHECK	ZHAOZZ	150116
APPROVED	HUXW	150116

LSDCONN® Http://www.lsdconn.com
WT® Http://www.asia-wt.com

■深圳朗思达 □香港朗思达
□东莞共营 □前海共赢

connector & cable

DRAW NAME: SD卡座 标准型 长体 铜壳 白胶

P/N NO. SD-050-11K-W0

SHORT CODE 10100091

MODEL W0

REV. A

UNIT: mm

SHEET: N/A

SCALE N/A