
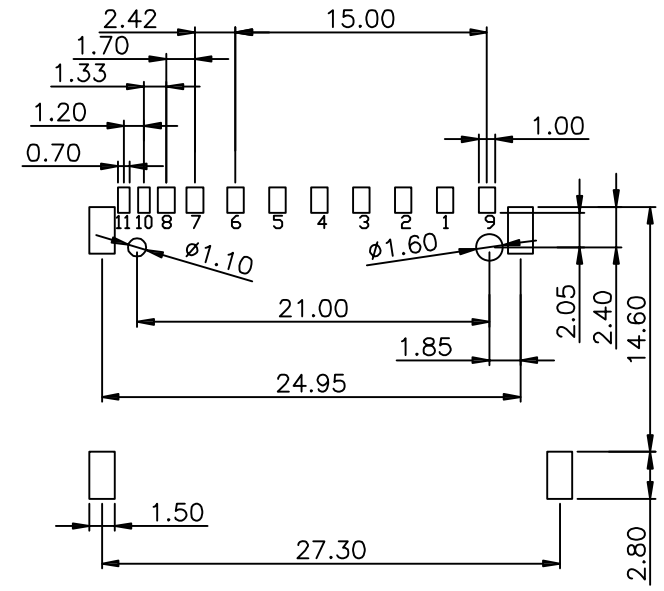


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	111120	HANG

SPECIFICATION

CONTACT CURRENT RATING:0.5 Ampees
 DIELECTRIC WITHSTANDING VOLTAGE:AC/DC200V r.m.s
 INSULATION RESISTANCE:1000mΩ Minimum
 CONTACT RESISTANCE:50mΩ ~100mΩ Maximum
 OPERATING TEMPERATURE:-20°C ~+60°C
 CONTACT INSERTION FORCE:1.0Kgf Maximum
 CONTACT SEPARATION FORCE:0.2Kgf Minimum
 INSULATOR:HL-TEMP PLASTIC UL 94V-0 RATED

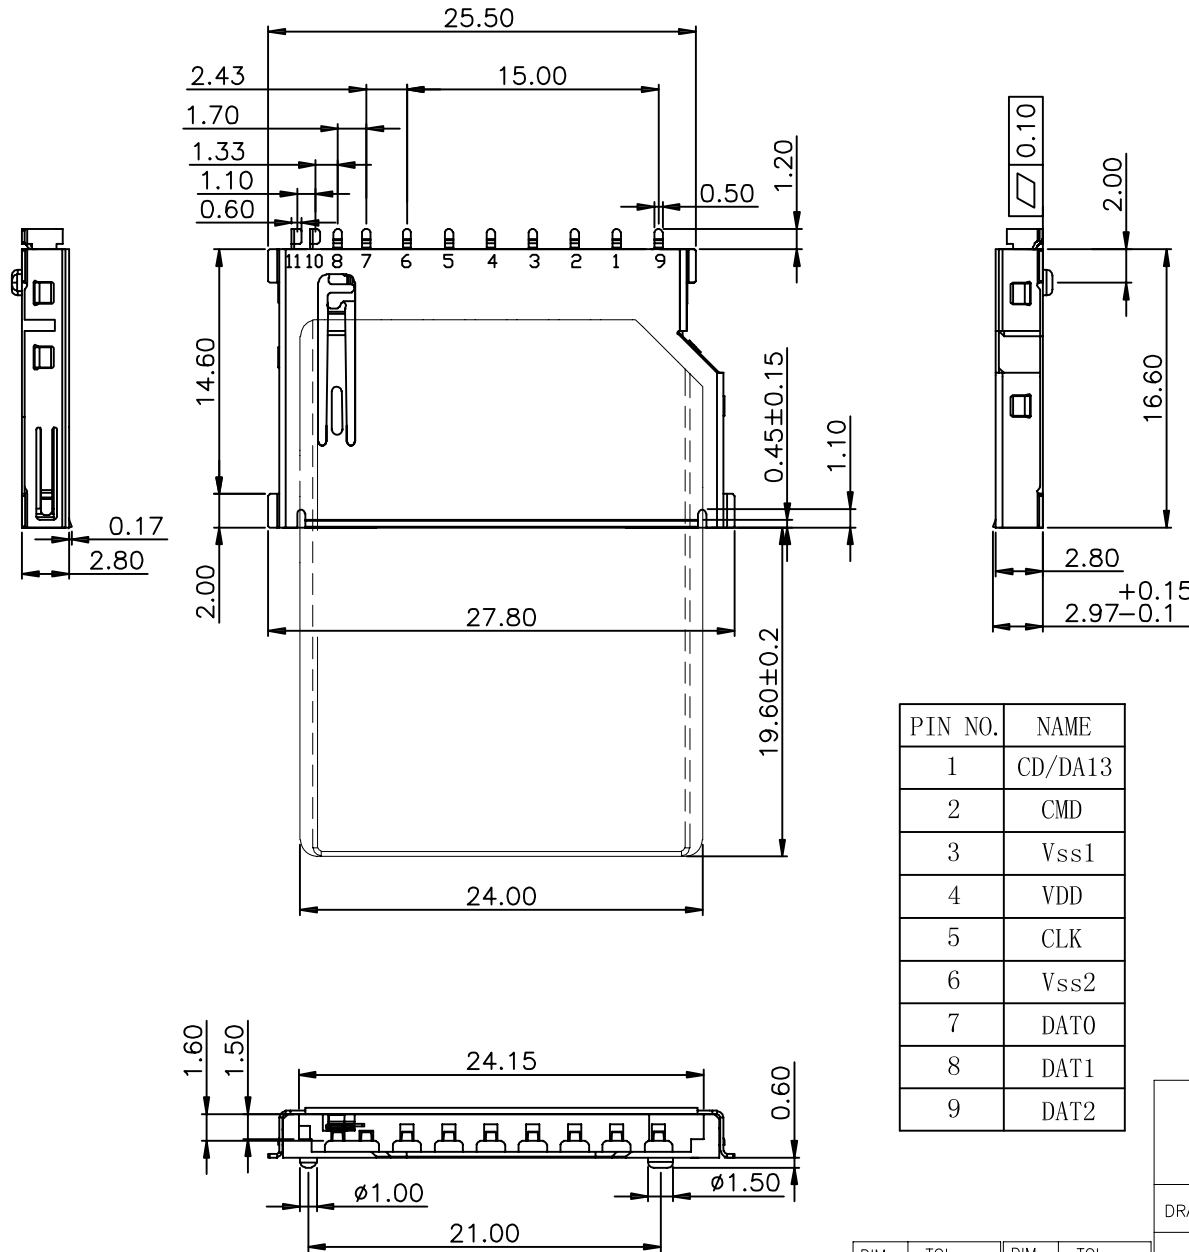

PCB LAYOUT

PIN NO.	NAME
1	CD/DA13
2	CMD
3	Vss1
4	VDD
5	CLK
6	Vss2
7	DAT0
8	DAT1
9	DAT2

LASTAR

Lastar Technology CO.,LTD

DRAW NO.	050-00D-0904	DATE	DRAW NAME: SD Card Connector Short Type Black		
DESIGN	HANG	110205	P/N NO. SD-050-00D-0904		
CHECK	WANGCM	110205	FILE:		
APPROVED	HUYX	110205	UNIT: mm	SHEET: N/A	MODEL: REV. A
			SCALE N/A		

DIM	TOL	DIM	TOL
X.	±0.30	X".	±4.0"
X.X	±0.25	X.X"	±3.0"
X.XX	±0.20	X.XX"	±2.0"
X.XXX	±0.10	X.XXX"	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION