

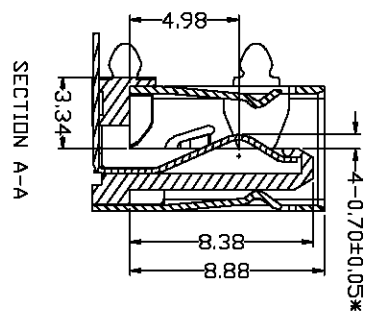
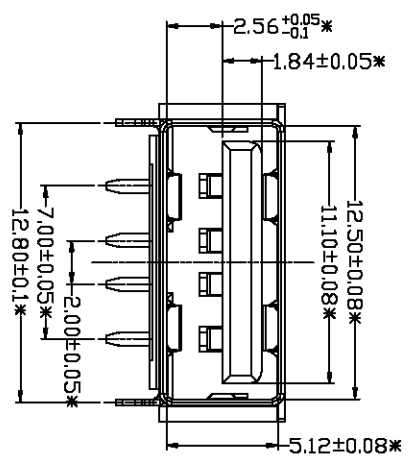
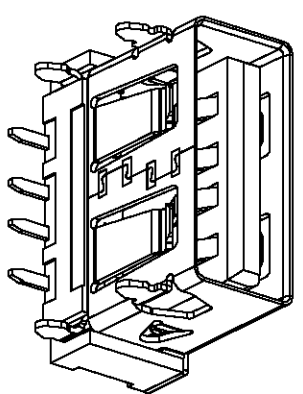
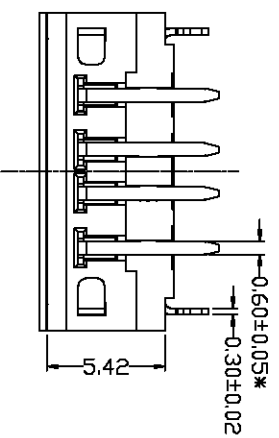
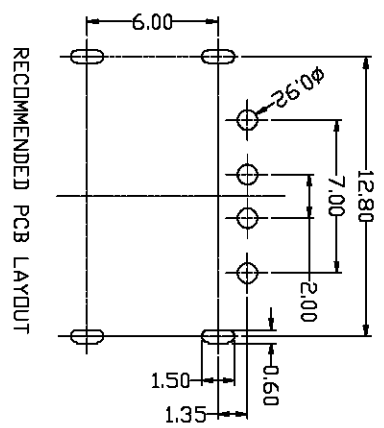
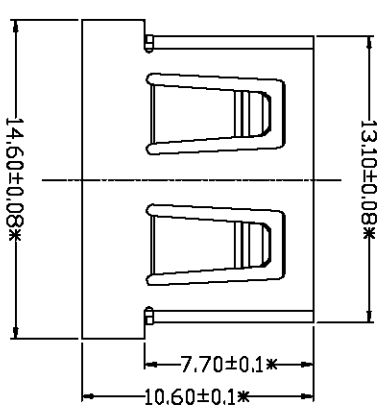
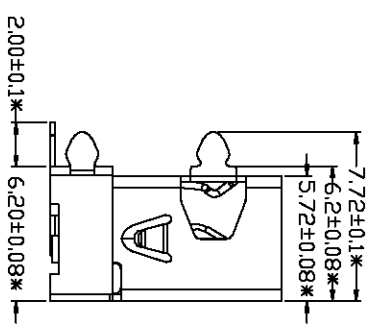


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER		HANG
C					HANG

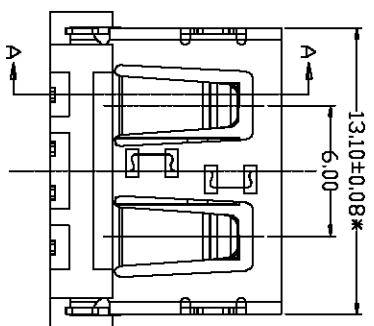

1. Material
 - 1.1 Housing: Thermoplastic: UL 94V-0, LCP Black
 - 1.2 Shell: Phosphor Bronze, T=0.30mm, Plated Nickel
 - 1.3 Terminal: Phosphor Bronze, t=0.25mm, Gold Flash, 15U" or 30U" Gold Plating Over Nickel On Contact Area, Tin Plating On Solder Tail
2. Electrical
 - 2.1 Contact Resistance: 30mΩ Max
 - 2.2 Insulation Resistance: 1000MΩ Min
 - 2.3 Dielectric Withstanding Voltage: 500VAC
 - 2.4 Operating Current: 0.3A to 1.8A (determined based on differences in plating)
3. Mechanical
 - 3.1 Insertion Force: 30N Max
 - 3.2 Extraction Force: 10-30N
 - 3.3 Operating Temperature: 0°C ~ +85°C

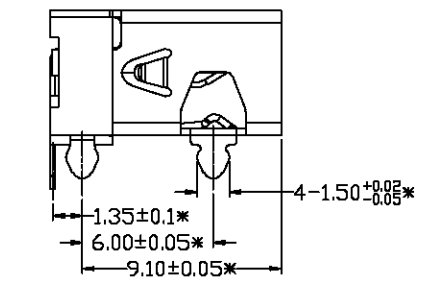

DIM	TOL	DIM	TOL
X	±0.30	X'	±4.0'
X.X	±0.25	X.X'	±3.0'
X.XX	±0.20	X.XX'	±2.0'
X.XXX	±0.10	X.XXX'	±1.0'

ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN MILLIMETERS
DIMENSIONS AND TOLERANCES ARE THE PROPERTY OF LASTAR TECHNOLOGY CO., LTD.

LASTAR

Lastar Technology CO., LTD

DRAW NO.	112-24C-04	DATE	110316
DESIGN	HANG	110316	
CHECK	WANGCM	110316	
APPROVED	HUYX	110316	

DRAW NAME:	USB Female DIP90° Short Type
P/N NO.	USB-112-24C-04J4
UNIT:	mm
SHEET:	N/A
MODEL:	
REV. C	SCALE N/A