

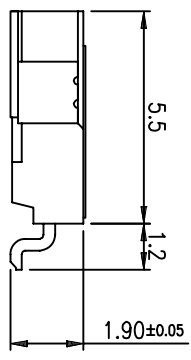
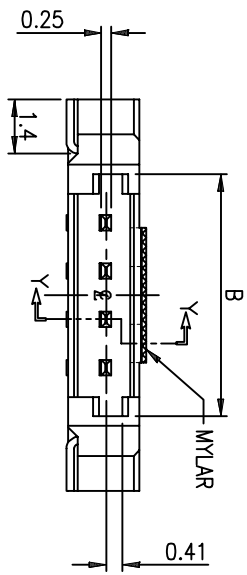



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	080505	HANG

Specifications
Current Rating: 1.0A AC,DC
Contact Resistance: 20M Ω Max
Voltage Rating: 100V AC,DC
Dielectric Withstanding Voltage: 250VAC/Minute
Ambient Temperature:-25 °C to +85 °C
 (including temperature rise)

Housing: UL94-V0,LCP
CONTACT: PHOSPHOR BRONZE

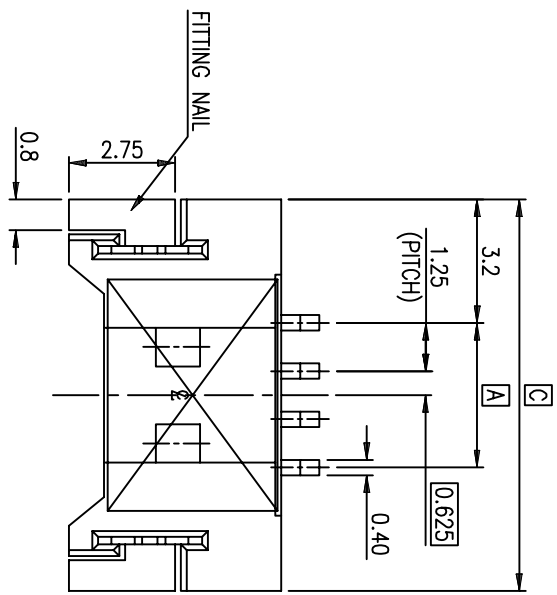

Circuits	A	B	C
02	1.25	3.77	7.65
03	2.50	5.02	8.90
04	3.75	6.27	10.15
05	5.00	7.52	11.40
06	6.25	8.77	12.65
07	8.00	10.02	13.90
08	9.25	10.27	15.15
09	10.50	11.27	16.40
10	11.25	12.52	17.65
12	13.75	13.77	20.15
14	16.25	16.27	22.65
15	17.50	18.77	23.90
16	18.75	20.02	25.15
18	21.25	21.27	27.65

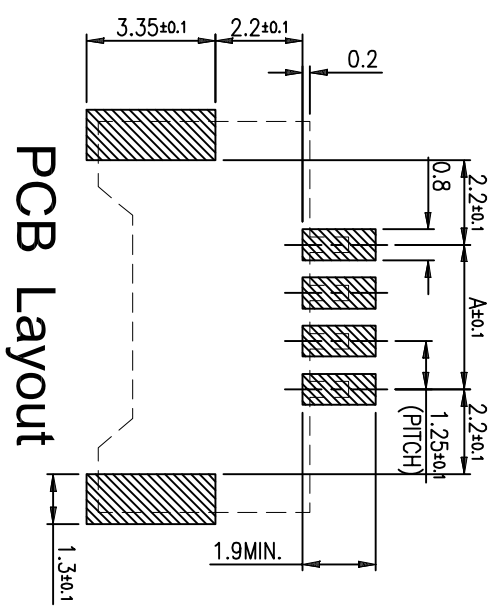

DIM	TOL	DIM	TOL
X.	±0.30	X.	±4.0"
XX	±0.25	XX	±3.0"
XXX	±0.20	XXX	±2.0"
XXXX	±0.10	XXXX	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY CUSTOMER. LASTAR AND SERIAL NO. 08050506 ARE NOT TO BE REPRODUCED WITHOUT PERMISSION.

LASTAR

Lastar Technology CO., LTD

DRAW NO.	125-01A-XX	DATE	080505
DESIGN	HANG	CHECK	WANGCM
APPROVED	HUYX		080506

DRAW NAME:	Water Pitch1.25mm SWT 1.9H
P/N NO.	WF-125-01A-XXK5
UNIT:	mm
SHEET:	N/A
FILE:	
MODEL:	
REV. A0	SCALE N/A